

Access Control

Microlock[®] Prox 200

Microlock[®] Prox 200 is a programmable reader/controller, providing low-cost stand-alone access control to a single door for up to 200 users.

Product Features

- Stand-alone access control for a single door
- Integrated proximity reader
- 200 user capacity
- Easy programming via keypad and display
- Up to 130mm read range
- Card-only, Card+PIN or PIN-only access modes
- Standard ISO cards or key tags available
- Easy to install, set up and use
- Suitable for external installation
- Built-in interface for connection to larger systems



Ramón y Cajal, 5 - 28100 Alcobendas (Madrid) Tlf. 91 662 51 08 Fax. 91 661 30 77C
www.ssiseguridad.com ssi@ssiseguridad.com

ssi

Seguridad y Sistemas
Informáticos


TDSi
GROUP

Time and Data Systems International Ltd
Sentinel House, Nuffield Road, Poole, Dorset, BH17 0RE, UK.
Tel: +44 (0) 1202 666222 Fax: +44 (0) 1202 679730
Email: sales@tdsi.co.uk Internet: www.tdsi.co.uk

BSIA
THE BRITISH SECURITY
INDUSTRY ASSOCIATION

18 YEARS
OF
THE LEADING EDGE OF TECHNOLOGY

TDSi
established 1982

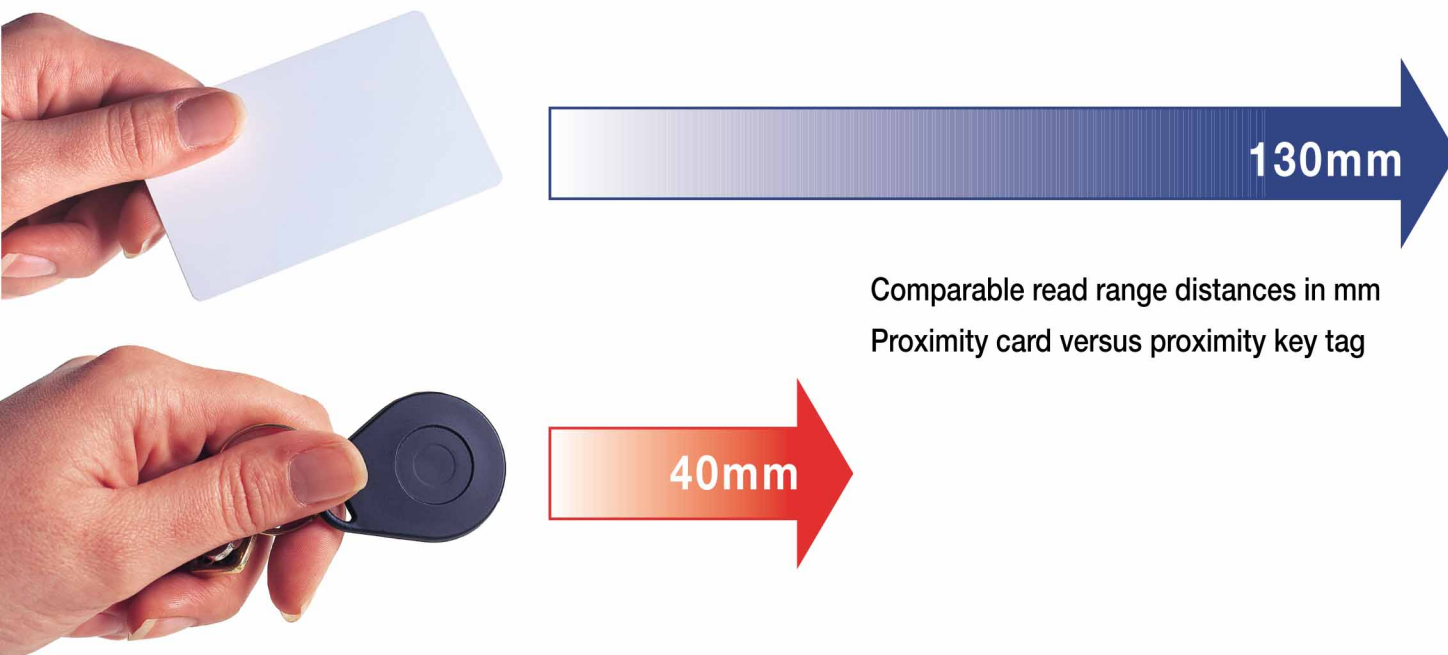

The Microlock® Prox 200 has the ability to store up to 200 proximity cards or 4-digit PINs in its memory, providing stand-alone access control to a single door.

Microlock® Prox 200 offers low-cost, entry-level access control without the fundamental problems inherent in keypad-only solutions.

System Upgrade

Microlock® Prox 200 offers an upgrade path for future system expansion by providing a data output to TDSi's range of networkable access control units. This allows Microlock® Prox 200 to function within a larger system as a simple proximity reader and keypad as the requirements of your access control system grow.

Feature		Technical Data	
Reading technology	Proximity	Part No.	5002-1280
Maximum user capacity	200	Dimensions in mm	120 x 100 x 30
Door configuration	1 door/1 reader,1 keypad	Operating temperature	-10°C to +50°C
Card-only access	Yes	Humidity	Waterproof
PIN-only access	Yes	Relay contacts	2A 30V DC changeover
Card + PIN access	Yes	Power supply	12 V DC / 200mA max
No. of cards included	10	Interface	ISO track 2 magnetic stripe compatible (10 digits)
Anti-tamper facility	Yes		
Data output for future upgrade	Yes		

Ramón y Cajal, 5 - 28100 Alcobendas (Madrid) Tlf. 91 662 51 08 Fax. 91 661 30 77L
www.ssiseguridad.com ssi@ssiseguridad.com